


<格亚电气方案>




直流熔断器支座 (GYPV-1038)
DC Fuse Holder

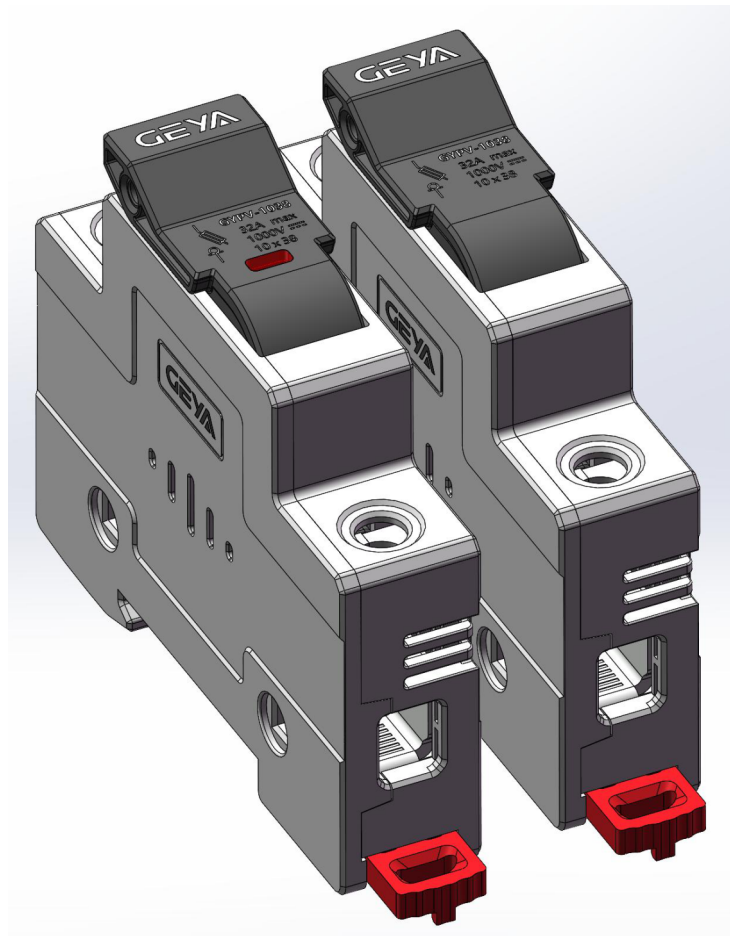

<格亚电气方案>

直流熔断器支座 (GYPV-1038) DC Fuse Holder



< Product Size >

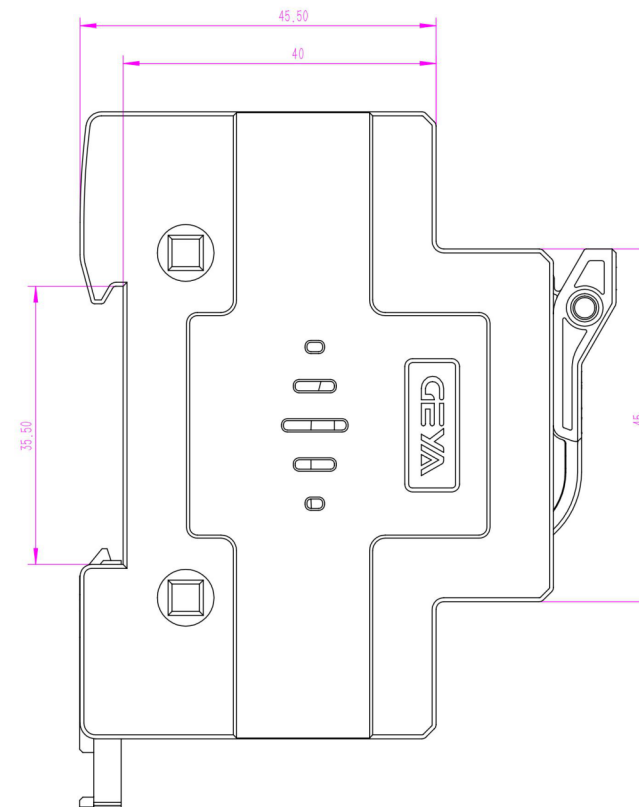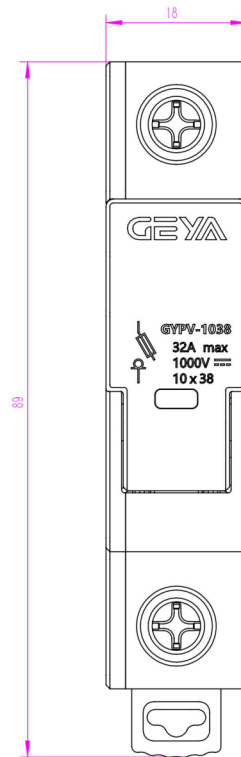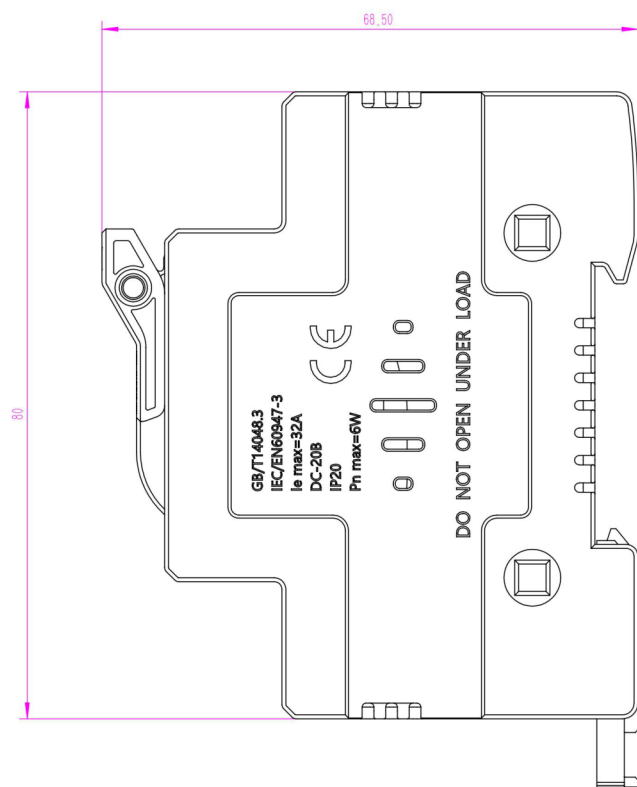

<格亚电气方案>

直流熔断器支座 (GYPV-1038) DC Fuse Holder

< Product CMF diagram >

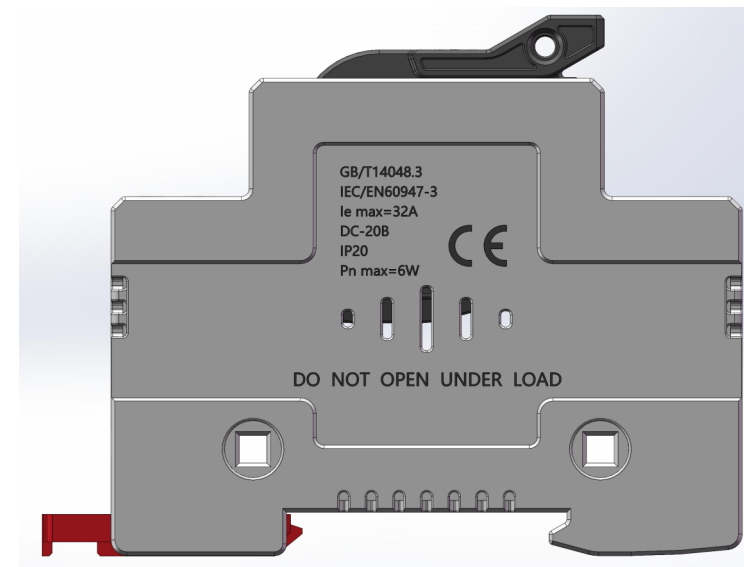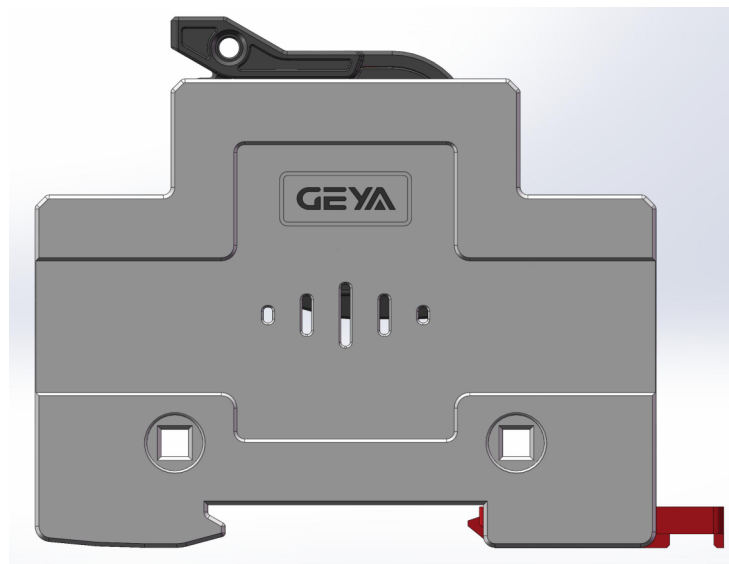

<格亚电气方案>

直流熔断器支座 (GYPV-1038) DC Fuse Holder

< Function and performance >

Parameters

Type: GYPV-1038

Product specifications

Executive Standard: IEC60947-3 、
GB/T14048.3

Use category: DC-20B

Standard basis Electrical characteristics

Rated voltage: 1000V DC

Rated current: 32A max

Maximum power consumption: 6W

Connection and installation

Connecting and installing wires: 1.5-10mm²

Terminal screw: M5

Torque: ≥3Nm

Protection level: IP20

Installation Environment

Fuse specifications: 10*38mm < IEC/EN60269-6 >

Installation method: DIN-rail < IEC/EN60715 >

Working temperature: -20℃~+70℃

Pollution level: 3

Relative humidity: +20℃≤95%, +40℃≤50%

Installation level: III

<格亚电气方案>

直流熔断器支座 (GYPV-1038)
DC Fuse Holder

< Product structure parameters >

Shell material	PBT plastic
Metal Material	Copper T1 (silver plated£©
Dimensions < L * W * H >	89mm * 18mm * 68mm
Logo and font craftsmanship	Laser Marking
Color	off-white
Net weight	61g / 62g(with light)

<格亚电气方案>

直流熔断器支座 (GYPV-1038)
DC Fuse Holder

< Packaging parameters >

Packaging data	Size<cm>	PCS/CTN<Pcs>	GW<Kg>	Remark
Middle box	18.7 * 9.1 * 7.4	10	0.64 / 0.65 (with light)	Neutral + mark
Outer box	39 * 39 * 20	200	13.36 / 13.56 (with light)	Neutral + mark